

Magic Wahi, Avatar Naya

Introducing Tata Magic Petrol

Sawariyo ke liye safety, Maalik ke liye fayda



BS6 P2»»
Phase2 Ready



Better Fuel Efficiency



Lower Total Cost of Ownership



Safer



Smarter



Greener

TATA
magic



Torque of 55 Nm

Power of 22 kW

Petrol MPFI BS6

 Best-In-Class Mileage



Low Maintenance and Easy Serviceability of MPFI Petrol Engine

- Maximum power of 22 kW @ 4 000 r/min
- Maximum torque of 55 Nm @ 2 500 - 3 500 r/min
- Less gear shifts - better clutch life



Bigger Clutch

- 170 mm dia. clutch
- Increased surface area of clutch ensures longer clutch life

Spacious and Comfortable 10-Seater





Gradeability

- Gradeability of 12.8 %
- Multi-terrain capability





5-Speed Gearbox

- Good fuel economy without compromising on the acceleration
- Additional 5th gear helps achieve better speed and performance at lower engine r/min
- Enhances engine life

New Dashboard with Digital Cluster & Better Driver Ergonomics



- Reverse Park Assist
- USB charger
- Economy mode
- Fatigue-free driving

Strong Aggregates and Durable Body


- Leaf-spring at both ends for better load capacity
- Anti-roll bar for better stability
- Low rolling resistance tubeless tyre
- Front disc and rear drum brake
- Strong cabin and reinforced body for safety



Technical Specifications

		Magic Express Petrol	Magic Mantra Petrol
ENGINE	Engine	Engine TATA 275 MPFI03 Petrol	
	Engine Capacity	694 cc	
	Max. Engine Output	22 kW @ 4 000 r/min	
	Max. Torque	55 Nm @ 2 500 - 3 500 r/min	
	No. of Cylinders	2 inline	
	Clutch	170 mm outside diameter of clutch lining	
	Clutch Type	Single plate dry friction diaphragm type	
CLUTCH & TRANSMISSION	Type of Actuation	Cable operated with manual wear adjustment	
	Transmission Description	Manual transmission	
	Gearbox	5 Forward, 1 Reverse, Synchromesh on all forward gears, sliding mesh for reverse gear	
AXLES	Rear Axle	Banjo type with hypoid gears and semi floating axle shafts	
	Front Axle	Rigid beam construction	
SUSPENSION	Front	Rigid Axle with semi-elliptical leaf spring	
	Rear	Live Axle with semi-elliptical leaf spring	
	Suspension with Shock Absorber	Hydraulic double acting telescopic type	
BRAKES	Front	Disc brakes	
	Rear	Drum brakes	
	Brakes	Hydraulic brakes with Vacuum Booster and ABS 9.0	
TYRES	Tyre Size	155 R 13 LT	145 R 12 LT
	Min. Ground Clearance	150 mm	
	Min. Turning Circle Dia	8 600 mm	
DIMENSIONS	Wheelbase	2 100 mm	
	Length	3 790 mm	
	Width	1 500 mm	
	Height	1 890 mm	1 860 mm
FUEL TANK	Capacity	26 l Metallic	
PERFORMANCE	Gradeability	11.6 %	12.8 %
WEIGHTS	GVW	1 830 kg	1 760 kg
ELECTRICALS	Alternator Capacity	70 A	
	Battery	12 V, 55 Ah	
SEATING CAPACITY		9 + D	
WARRANTY		2 Years / 72 000 km	
COLOUR OPTIONS		Arctic White & Golden Yellow	Arctic White

SEATING CAPACITY : DRIVER + 9

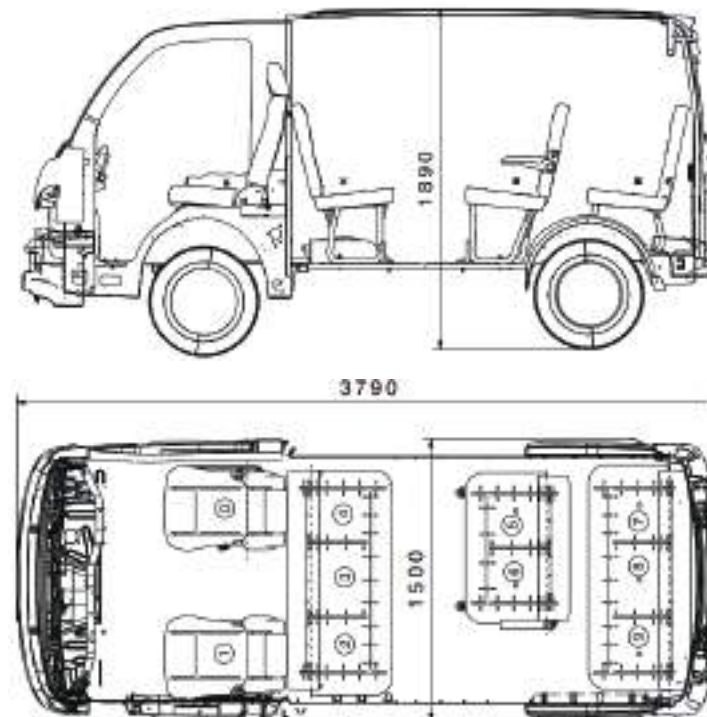

Widest
Service Network



Tata Genuine Parts
in every location



FIRST STEP TO SUCCESS

Best-in-Class
RESALE Value

TATA MOTORS

For more information, visit

www.magic.tatamotors.com | 1800 209 7979

You can also contact our Sales Office: Tata Motors Limited, 4th Floor, Ahura Centre,
82, Mahakali Caves Road, MIDC, Andheri (East), Mumbai - 400 093.

All pictures shown are for illustration purpose only. Actual product may vary. CAUTION: Accessories shown in the picture or elsewhere do not constitute standard fitment. The specifications are merely indicative. Due to continuous product improvements, these specifications are liable to change without notice.

